


MWDS Evaluation Box

MA-K19959-KW Issue 1

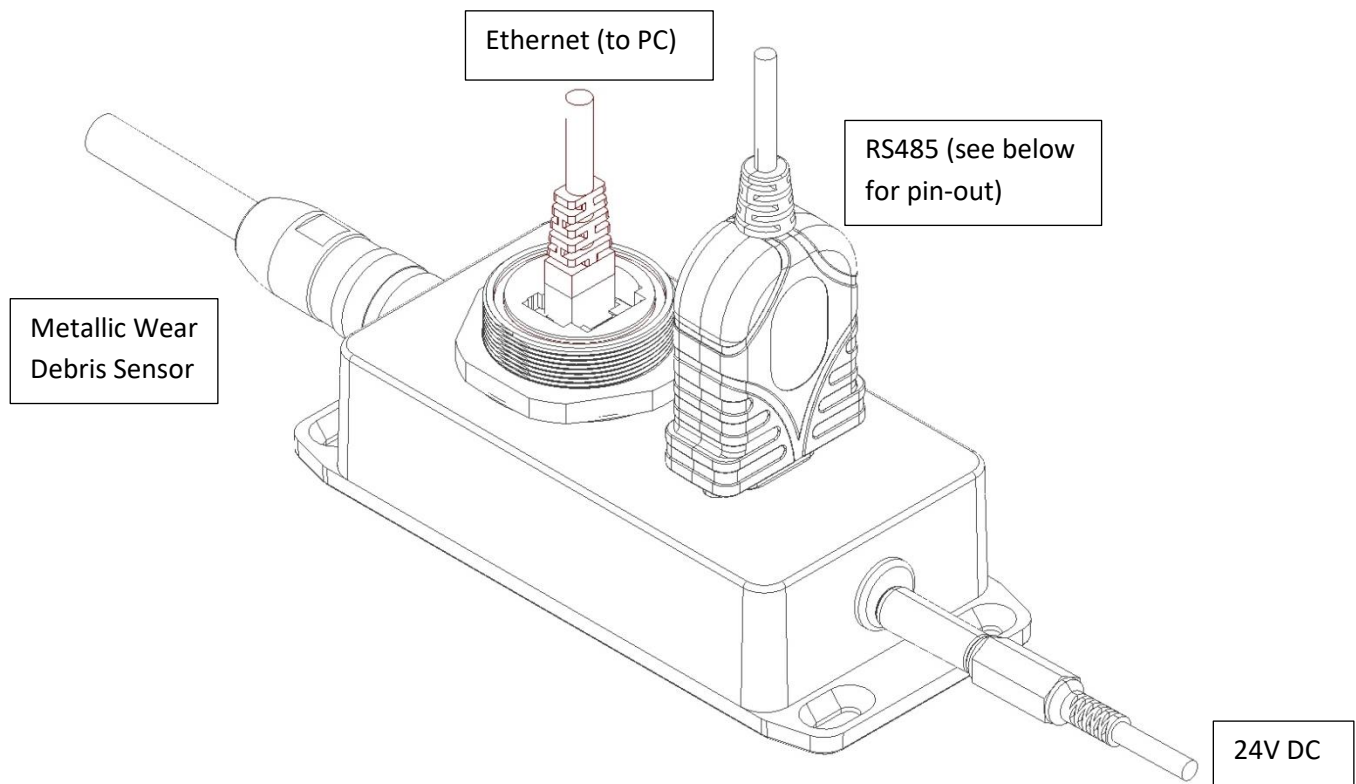

RS 485 Pin-out

Pin	Function
1	RS 485+ or CAN high*
2	RS 485- or CAN low*
5	Signal ground

*The MWDS can use RS485 or CAN, but not both at the same time. This reduces the twisted pair count in the cable as only one interface is required. Please refer to the MWDS Instruction Manual regarding the use of CAN.

Parker Kittiwake

3-6 Thorgate Road, Littlehampton
West Sussex, BN17 7LU, United Kingdom
Tel: +44 (0)1903 731470
Fax: +44 (0)1903 731480
Email: kittiwakesales@parker.com
Web: www.parker.com

